


1. Concrete shall be minimum 2500 psi at 7 days.
2. Pipe shall be ASTM D-3034.
3. Pipe fittings shall be Sched 40 PVC solvent weld.
4. Surrounding soil finished grade shall slope away from the dump port.
5. Required line venting shall conform to UPC.
6. Threaded plug shall provide a watertight seal except when dumping.
7. Concrete pad shall be placed over 12" of 3/4" minus crushed rock.
8. Concrete pad shall have 1-#3 rebar as shown.

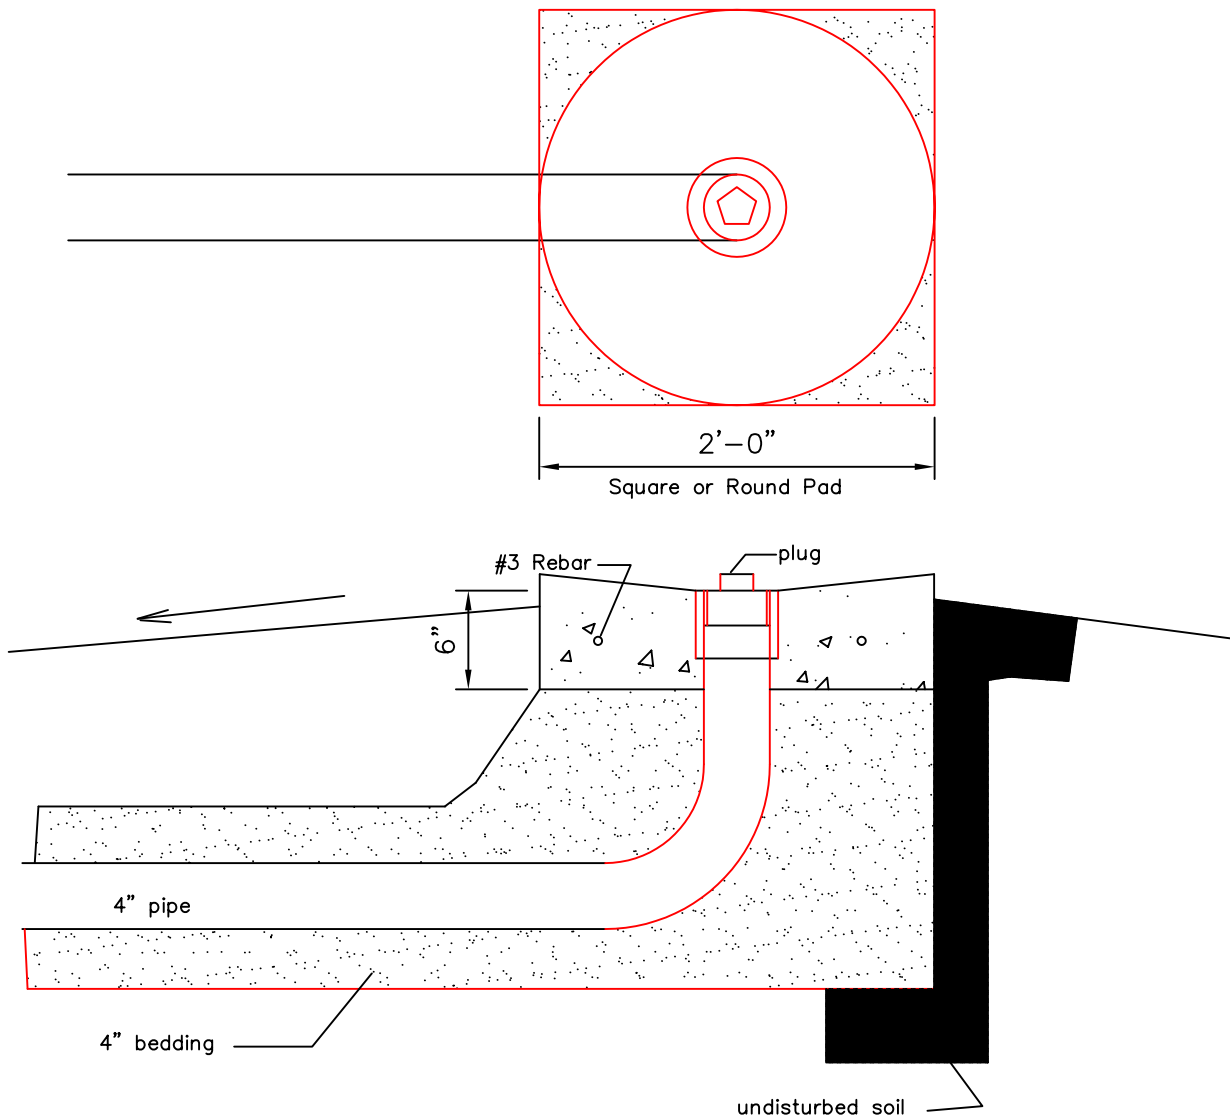

ROGUE VALLEY  
SEWER SERVICES

138 WEST VILAS ROAD

CENTRAL POINT, OR.

RESIDENTIAL RV DUMP

Rev. 12/98  
Rev.9/07

STANDARD  
DRAWING  
NO.  
5-7  
DATE: 9/07